ThermaSolutions

# ThermoChem™ HT-2000 unit
# Operator's Manual

Information in this document is subject to change without notice.

The ThermoChem HT-2000 Unit, its hardware and software, and this Operator's Manual contain proprietary information of ThermaSolutions. Receipt or possession of the ThermoChem HT-2000 unit or this manual does not convey any rights to reproduce or disclose its contents, or to manufacture, use, or sell anything that it may describe, in whole or in part, without the specific written consent of ThermaSolutions.

The ThermoChem HT-2000 Unit is protected under United States and international patents pending.

ThermoChem is a trademark of ThermaSolutions.

## Table of Contents


Symbols for General Warnings ..... iv

Symbols for General Warnings, cont. ..... v

Symbols for General Warnings, cont. ..... vi

Warnings, Precautions and Notes ..... 1

Warnings ..... 1

Indications for Use ..... 3

ThermoChem HT-2000 unit Overview ..... 3

Preparing the ThermoChem Unit HT-2000 Unit ..... 7

Hyperthermic Perfusion Kit and Installation ..... 8

Connecting the Perfusion Kit to the ThermoChem Unit ..... 9

Connect the Heat Exchanger Temperature Probe, Pressure Monitor and Water Lines. ..... 11

Priming the Hyperthermic Perfusion Kit ..... 14

Moving the Prepared ThermoChem Unit ..... 15

Patient Preparation and Connection of the Disposable to the Patient ..... 16

Initiating Patient Treatment ..... 17

Monitor Patient Treatment ..... 18

Discontinuing Patient Treatment ..... 19

Perfusion kit Removal ..... 20

Draining the Water Bath ..... 21

Exterior Cleanup ..... 21

Settings ..... 22

Set Time ..... 22

Set Date ..... 22

Set Language (if necessary) ..... 22

Calibrating Touch ..... 23

Routine Service, Preventative Maintenance and Repair ..... 24

Performed by ThermaSolutions ..... 24

Performed by user ..... 24

Please see ThermoChem Cleaning and Disinfection Manual, for all updated procedures for cleaning of the device, water bath reservoir and components. (Document # MNL-2020) ..... 24

1. Drain the unit into container capable of holding at least three liters (3L) of fluid. Discard the water in accordance with facility policy ..... 24

2. Document the maintenance work on the unit. ..... 24

Troubleshooting ..... 25

Unit Specifications ..... 30

Appendix A: Data Input and User Log Export ..... 31

# List of Figures

Figure 1: Touchscreen Monitor Display..... 4

Figure 2: Rear and Front views of the ThermoChem Unit..... 5

Figure 3: TSP HIPEC Disposable Kit..... 8

Figure 4: Disposable Connected to the ThermoChem Unit..... 10

Figure 5: Temperature Probe Connections..... 11

Figure 6: Pressure Sensor Connections..... 12

Figure 7: Water Line Connections..... 13

Figure 8: Touchscreen Monitor..... 14

Figure 9: Alternate Water Bath Buttons..... 15

Figure 10: Temperature Probe Labels Screen..... 16

Figure 11: Settings Screen..... 222

Figure 12: USB Shutdown Screen..... 32

Figure 13: Patient Log Download..... 32

Figure 14: Patient Information Screen..... 34

Figure 15: Treatment Information Screen..... 35

## Symbols for General Warnings

Attention, see instructions for use

Method of sterilization, ethylene oxide

Type B applied part complying with the specific requirements of the standard IEC60601-1 to provide protection against electrical shock, particularly regarding allowable leakage current. Not suitable for direct cardiac application.

Do not reuse

Date of manufacture (YYYY-MM)

Serial number

Alternating current




Storage temperature range

Protective earth ground

CE Mark

## Symbols for General Warnings, cont.

Do Not Push

Not made with natural latex rubber

Do Not Use if Package Damaged

Manufactured By

Caution: Federal law (USA) restricts this device to sale by or on the order of a licensed physician.

Type CF applied part complying with the specific requirements of the standard IEC60601-1 to provide protection against electrical shock, particularly regarding allowable leakage current.

USB Connection

Temperature Probe Connection

Equipotentiality

## Symbols for General Warnings, cont.

| | |
|---|---|
| | Caution |
| | Pressure Sensor Connection |
| IPX0 | Ingress Protection Rating: No protection against ingress of water |
| | Operating Instructions-refer to instructions before use |

## Warnings, Precautions and Notes

This manual includes the following:

- **WARNINGS** emphasize situations that could result in serious injury and/or death.
- **CAUTIONS** emphasize situations that could result in serious damage to equipment.
- **NOTES** provide additional, important information regarding a specific procedure.
- **Unit Specifications** alert operators to the environmental conditions under which the ThermoChem™ HT-2000 unit is used and stored.

### Warnings

- Read this Operator's Manual in its entirety before operating the ThermoChem unit. Failure to read the manual could result in harmful effects to the user, patient, and/or ThermoChem unit and disposable.
- Removal of access covers or components that require a tool to remove are prohibited by anyone other than ThermaSolutions approved service personnel
- Hyperthermic perfusion at high temperatures for extended periods of time may result in acute or chronic thermal injury locally and/or systemically. Use caution when perfusing liquids at temperatures above 43°C for more than 60 minutes. Time-temperature combinations exceeding either or both of these parameters could result in serious injury.
- Do not use electrocautery or other electrosurgical devices when the perfusion kit tubing has been placed in the patient and the ThermoChem unit is operating.
- The Hyperthermic Perfusion kit is for single use only. Disposable components not used during the procedure, MUST be discarded and disposed of properly.
- If the Hyperthermic Perfusion kit package is damaged, DO NOT use. Damaged packaging could compromise the sterility of the components. Replace with a new Disposable kit package and notify customer service at the number listed on the back of this manual.
- Only Hyperthermic Perfusion kits supplied by ThermaSolutions. are to be used with the ThermoChem unit.
- Use aseptic technique when connecting patient catheters to the perfusion kit inflow tube and return tube. Failure to use aseptic technique could contaminate the sterile field.
- The ThermoChem HT-2000 is designed to work with disposable patient temperature probes supplied by ThermaSolutions. Use of other temperature probes could result in harm to the patient.
- If a ThermoChem HT-2000 malfunction occurs or the patient needs immediate attention, turn off the roller pump by pressing 'Stop Pump' on the touchscreen monitor.
- After treatment has been initiated, the non-disposable heat exchanger water lines and connectors will be hot and may present a scald hazard. Do not disconnect water lines while the ThermoChem unit is at operating temperature or is powered on and the water bath is circulating.

- To avoid risk of electric shock, this equipment must only be connected to a supply main with protective earth ground.
- No modification of this equipment is allowed.
- Do not modify this equipment without authorization of the manufacturer.
- Unauthorized modification of this equipment could cause it to be unsafe to operate.
- If this equipment is modified, appropriate inspection and testing must be conducted to ensure continued safe use of equipment.
- This device is not defibrillator proof and should not be connected to a patient when using a defibrillator.
- The TSP Hyperthermic Perfusion Kit is a single use only kit and should not be re-sterilized.
- The ThermoChem HT-2000 unit was not intended to be used in an oxygen rich environment or around flammable agents.
- The ThermoChem HT-2000 should be used only by Medical Professionals who are trained in the use of the device and who have an understanding of the English language.
- Do not fog or humidify the ThermoChem HT-2000 under any circumstances. If disinfection of the device needs to occur, please refer to the appropriate section of the Cleaning and Disinfection Manual.
- Do not fog or humidify the operating room while the ThermoChem HT-2000 is inside the room. If the operating room is to be fogged or humidified, remove the ThermoChem HT-2000 from the room before and during the procedure.

## Precautions

- If using a physiological, compatible, sterile solution other than Lactated Ringer's solution, follow the alternate solution's manufacturer labeling regarding handling and disposal.
- Prior to plugging the ThermoChem unit in, the POWER switch must be in the OFF position and the power cord properly connected to the back of the unit. This will prevent any power surges to the unit.
- After mounting the Perfusion kit on the ThermoChem unit, starting circulation of the water bath, starting the heat exchanger, and before starting the patient pump, inspect the heat exchanger and disposable tubing for fluid. If fluid is visible anywhere in the Kit, the heat exchanger is faulty and the kit must be replaced. Notify Customer Service at the number listed on the back of this manual.
- Connection of the kit to the ThermoChem unit, disposable priming, and temperature probe setup must be completed prior to initiating patient treatment. Failure to thoroughly follow the setup instructions will prevent the ThermoChem unit and the kits from operating properly.
- When moving the ThermoChem unit, make sure to use handles provided on the device to avoid tipping.

- Make sure when operating the ThermoChem unit that it is placed in a location and position that will allow easy access to the power cord and switch.

When Power cycling the ThermoChem unit wait 10 seconds before turning back on.

**Notes**

The Patient pump will stop if the top cover or door on the pump is opened.

**Contraindications**

- There are no contraindications for the ThermoChem units and the Hyperthermic perfusion kits

## Indications for Use

The ThermoChem™ HT-2000 unit is indicated to raise the core temperature of the peritoneum to a desired target temperature by continuously circulating and lavaging the peritoneum during a HIPEC procedure using warmed Lactated Ringer's Solution USP, or other physiologically compatible sterile solutions enriched with chemotherapeutic drugs. The company makes no claims beyond this type of therapy and thus considers the therapy non-hazardous.

## ThermoChem HT-2000 unit Overview

The ThermoChem HT-2000 unit is used along with the Hyperthermic Perfusion Kit

The ThermoChem unit houses an internal heating unit that warms distilled or sterile water to a desired temperature. This water is circulated to a heat exchanger where it warms Lactated Ringer's (or another physiologically compatible sterile solution) for infusion into the patient's peritoneal cavity. The ThermoChem unit also has hardware and software safety circuits to help protect against patient organ damage due to overheating.

The Hyperthermic Perfusion Kits consists of the heat exchanger, a fluid reservoir, and tubing. The warmed Lactated Ringer's (or another physiologically compatible sterile solution) is pumped through the tubing to the patient and then returns to the fluid reservoir.

The touchscreen monitor (Figure 1) provides for the user interface with the ThermoChem unit. From the touchscreen monitor, these main functions are controlled:

- Set the water bath temperature
- Start and stop the water bath
- Start and stop the heat exchanger
- Start and stop the roller pump
- Set the roller pump speed
- Temperature of the internal water bath
- Temperature of the patient fluid at the heat exchanger
- Pressure of fluid in the disposable measured at the heat exchanger
- Temperature(s) from patient temperature sensor(s), if connected

- Length of treatment, if desired
- Roller pump speed
- Alarm condition

**Figure 1: Touchscreen Monitor Display**

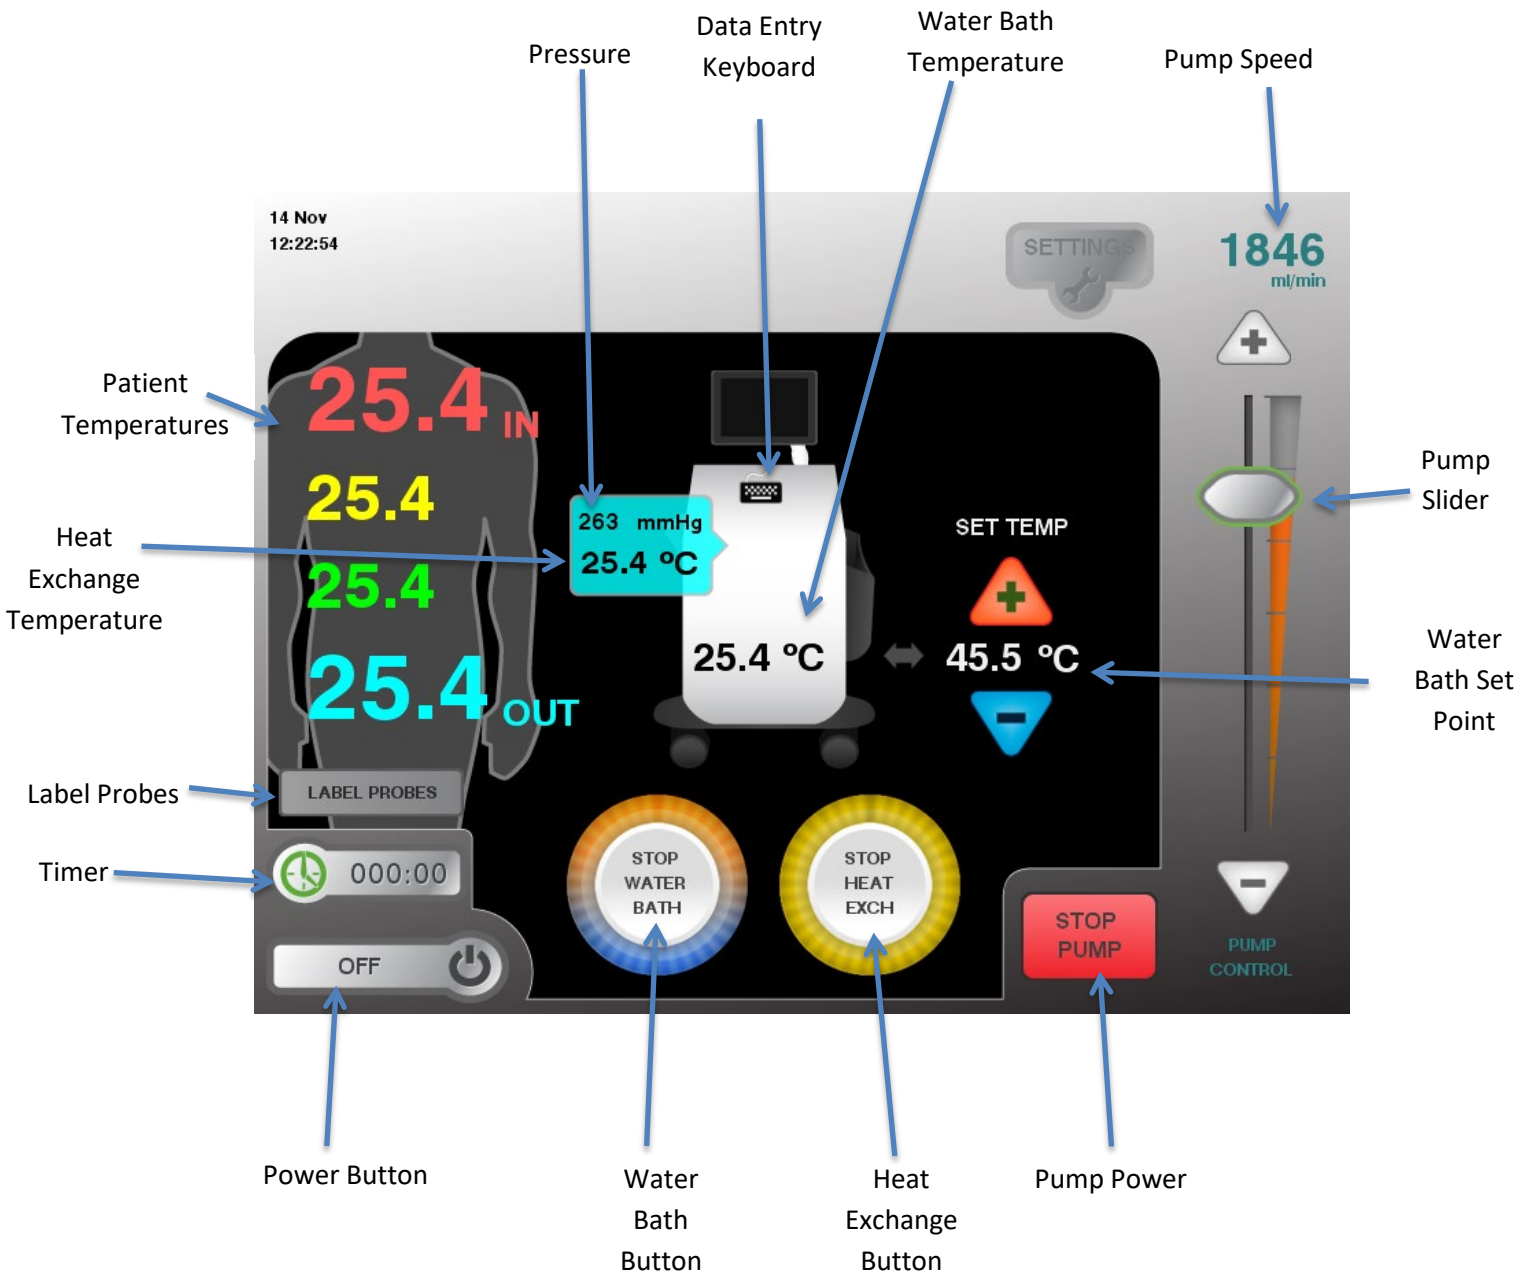

**Figure 2: Rear and Front views of the ThermoChem Unit**

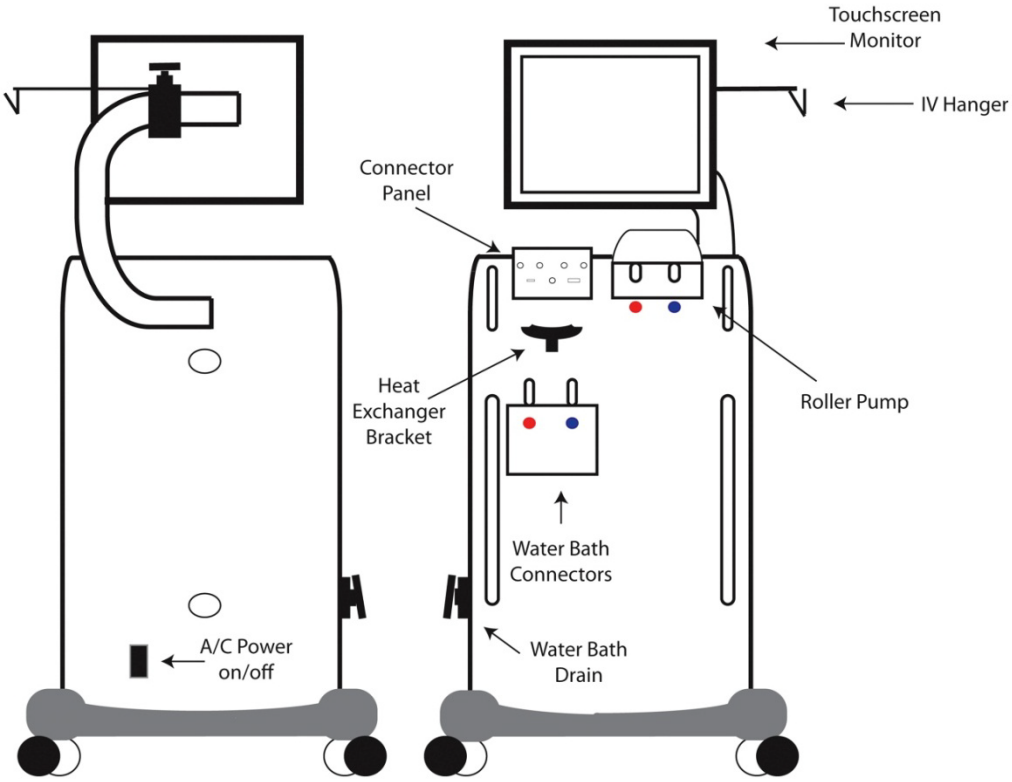

**ThermoChem HT-2000 Unit Components**

The ThermoChem HT-2000 consists of the following components:

| | |
|---|---|
| HT-2000 (101-200) | ThermoChem unit |
| 25541-03 or 25541-04 | AC Power Cord (USA-03, Europe-04) |
| CM-0003-10-5 | IV Hanger Rod |
| 17095-01 | Fluid reservoir bracket |
| 25540-03 | Four (4) non-disposable temperature probe extension cables, three (3) in the US. |
| 26035-02 | Two (2) non-disposable heat exchanger temperature probes |
| 038-0001 | Two (2) non-disposable heat exchanger water lines |
| MNL-2001 | Operator's Manual |
| MNL-2020 | ThermoChem Cleaning and Disinfection Manual |
| MNL-2010 | Quick Start Guide |
| 101-9005 | 6mm Allen Wrench |

Ordered separately to operate device as per intended use:

Hyperthermic Perfusion Kits (TSP 2011, TSP 1016)

## Preparing the ThermoChem Unit HT-2000 Unit

1. Lock each wheel of the ThermoChem unit. Press down on the wheel locks with your foot.

   **NOTE:** Lock wheels while setting up and using the ThermoChem unit.

2. Verify the water bath is empty and the drain valve is shut off. (Figure 2)
3. Open the water bath access door on the left side of the ThermoChem unit and fill the water bath with 2 liters (0.528 gallons) of distilled or sterile water.

   **NOTE:** If water backs up into the water bath access door, the water bath is full. Do not attempt to add additional water.

4. Power up the ThermoChem unit:
   a. Insert power cord into a standard electrical outlet.
      - United States – 120V/60Hz 12A
      - European Union – 240V/50Hz 6A
   b. Using the On/Off switch, turn power on.
5. Adjust the touchscreen monitor to the desired angle for proper viewing.
6. Insert the IV hanger into the hole on the touchscreen monitor support and secure by tightening the screw.
7. Secure the fluid reservoir bracket to the right lower handle on the front of the ThermoChem unit by tightening the bracket screw.

   **NOTE:** The fluid reservoir bracket may be placed anywhere on the handle. A lower position on the handle will increase the speed of drainage from the patient.

## Hyperthermic Perfusion Kit and Installation

The TSP Hyperthermic Perfusion Kit may include the following:

One (1) circulation loop with:
- One (1) Heat Exchanger
- One (1) Fluid Reservoir (4 L)
- PVC Tubing

One (1) Pressure Sensor
Patient Connection tubing line(s) with quick connects

TSP Table Pack or sterile patient connection tubing:
- Inflow and Outflow Catheters
- Patient connection tubing, inflow and outflow
- Patient temperature probes (Myocardial or General)
- Inline filters

**Note:** Contents may vary slightly depending on the kit version.

**Figure 3: Example:** TSP Hyperthermic perfusion Kit

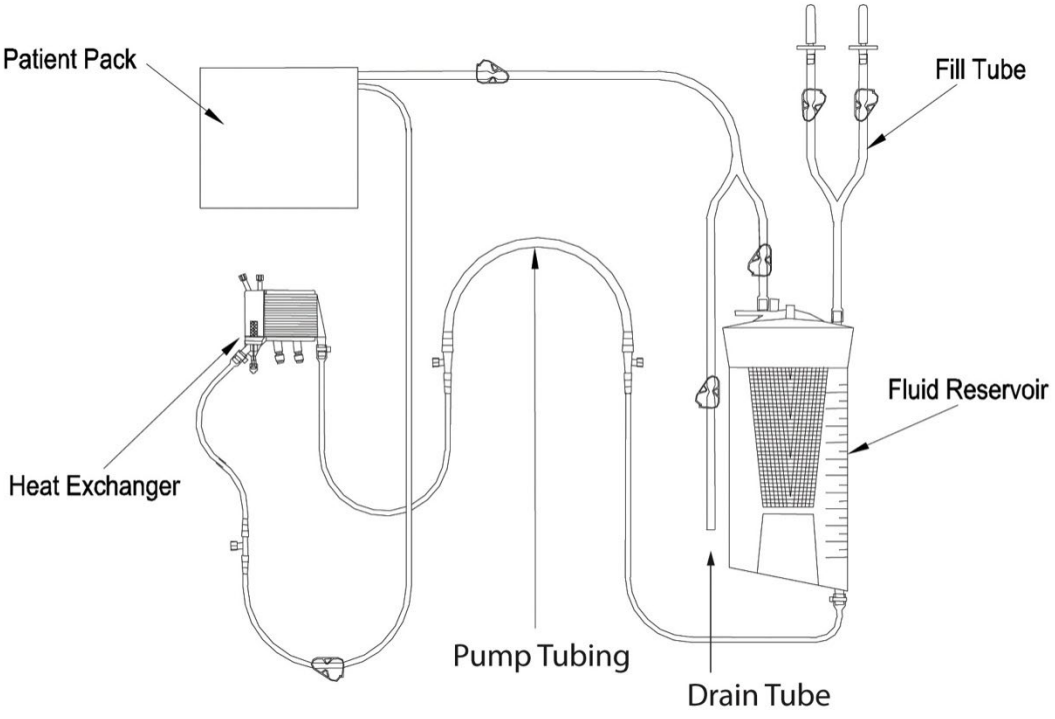

## Connecting the Perfusion Kit to the ThermoChem Unit

**NOTE:** Ensure that the fluid reservoir bracket is in place prior to opening the *TSP Hyperthermic Perfusion Kit*.

*Handle the perfusion kit tubing carefully as it is removed from the packaging*. Ensure that the sterility of appropriate components is maintained and that the tubing does not come in contact with the floor.

1. Remove the TSP Hyperthermic Perfusion Kit from the outer shipping box, if not already done.
2. Inspect the packaging to ensure it is sealed and that there is no visible or apparent damage.
3. Open the sterile package.

   **NOTE:** The kitis packaged sterile. Following appropriate hospital policies and procedures ensure that sterility is maintained for components coming in contact with the patient.
4. Remove the Table Pack and/or any sterile patient connection tubing and place in a secure location (e.g. pocket on right side of ThermoChem unit, table).

   **NOTE:** Additional components may be secured to the outside of the sterile package. Remove any additional items for assembly to the device or for the sterile field.
5. Remove the disposable tubing set from the now open sterile packing.

   **NOTE:** Maintain cleanliness of the disposable components during setup on the ThermoChem unit.
6. Check that all perfusion kit connections and caps are tight.
7. Set the fluid reservoir in the fluid reservoir bracket.
   a. Ensure tubing is not twisted.
   b. Clamp the drain line.
8. While holding the saline lines (if pre-attached), slide the heat exchanger into the heat exchanger bracket.
   a. Align the bottom of the heat exchanger with the bracket grove.
   b. Ensure filter and patient line are facing out.
9. Insert the pump tubing into the roller pump head matching red-to-red and blue-to-blue.

   **NOTE:** The portion of the tubing that is inserted into the roller pump is located between the red and blue bands on the tubing.
10. Manually rotate roller pump head to ensure tubing is seated properly in the pump head.

**Figure 4: Hypertyhermic Perfusion Kit Connected to the ThermoChem Unit**

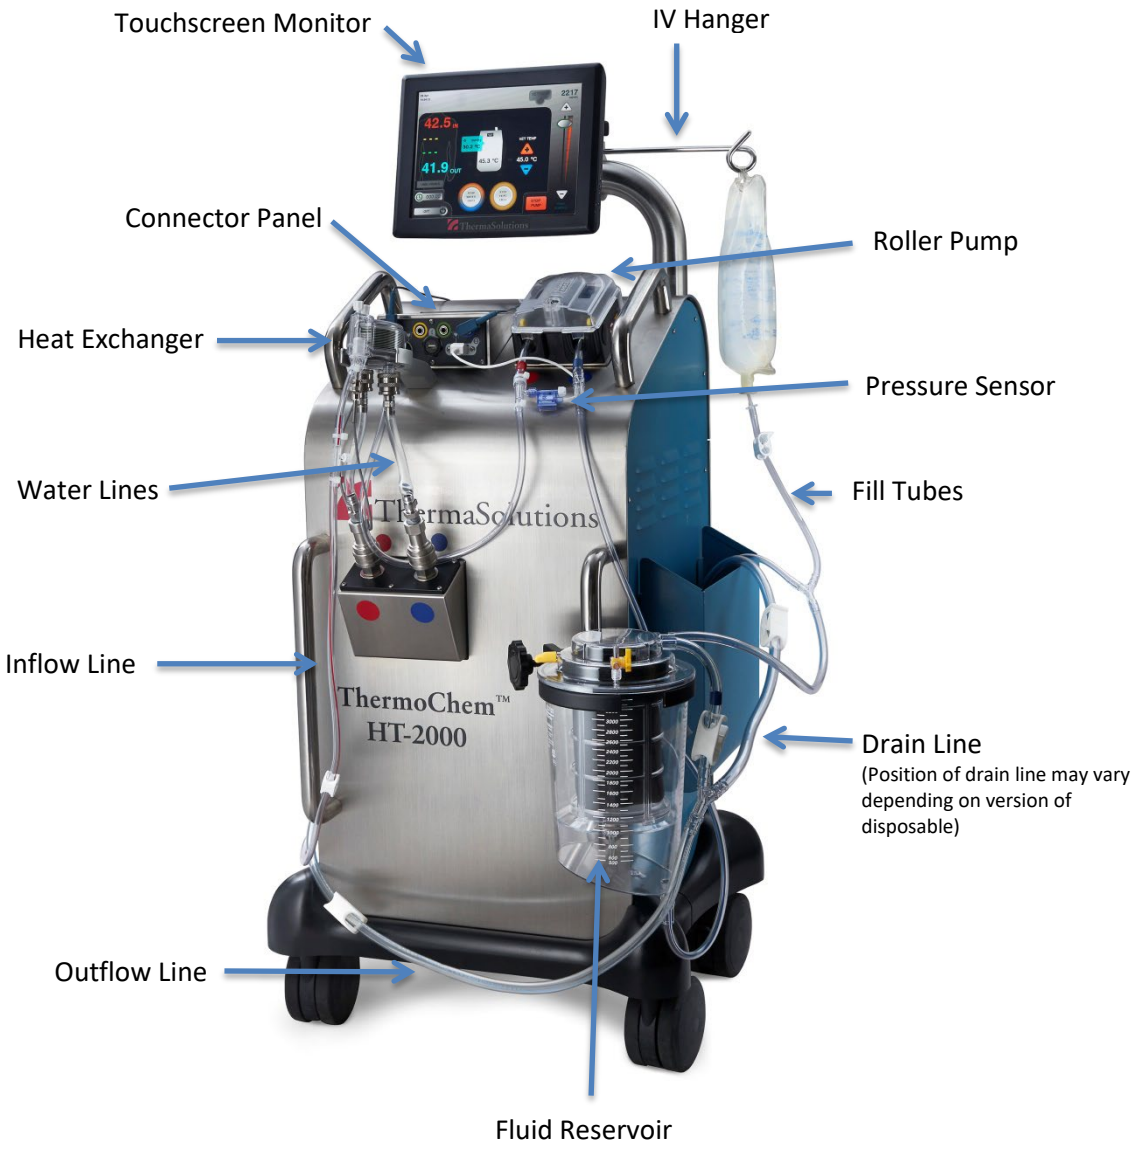

## Connect the Heat Exchanger Temperature Probe, Pressure Monitor and Water Lines.

1. Connect non-disposable/kit heat exchanger temperature probe. (Figure 5)
    a. Insert pointed end of temperature probe into bottom of heat exchanger filter and the plug into the ThermoChem unit connector panel.

**Figure 5: Temperature Probe Connections**

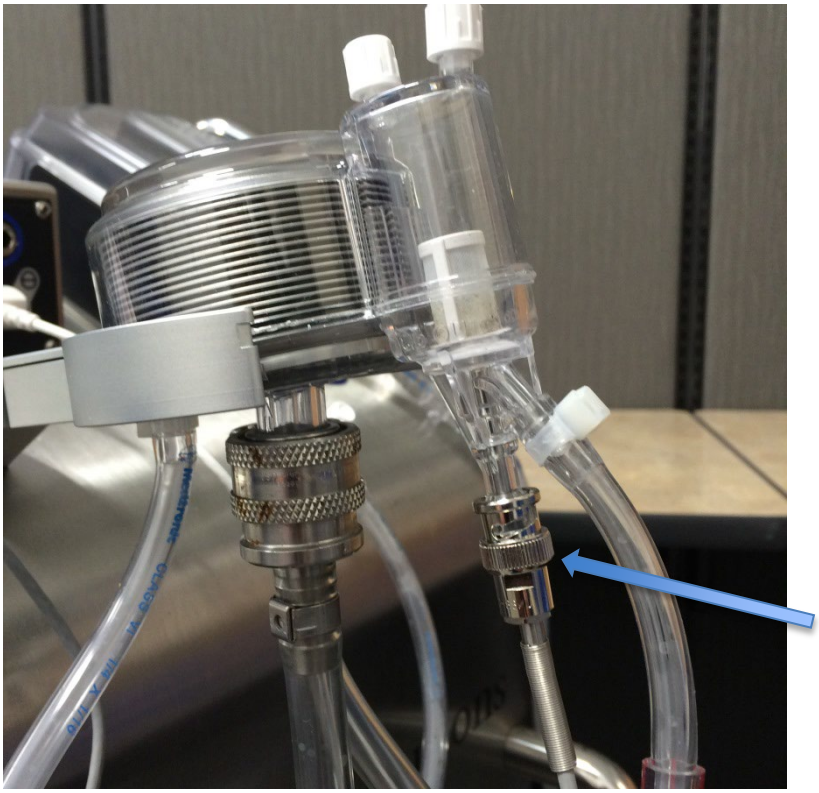

2. Connect Perfusion Kit pressure sensor to the first luer lock after the roller pump.

   Insert plug from the pressure sensor into the ThermoChem unit connector panel. (Figure 6)

**Figure 6: Pressure Sensor Connections**

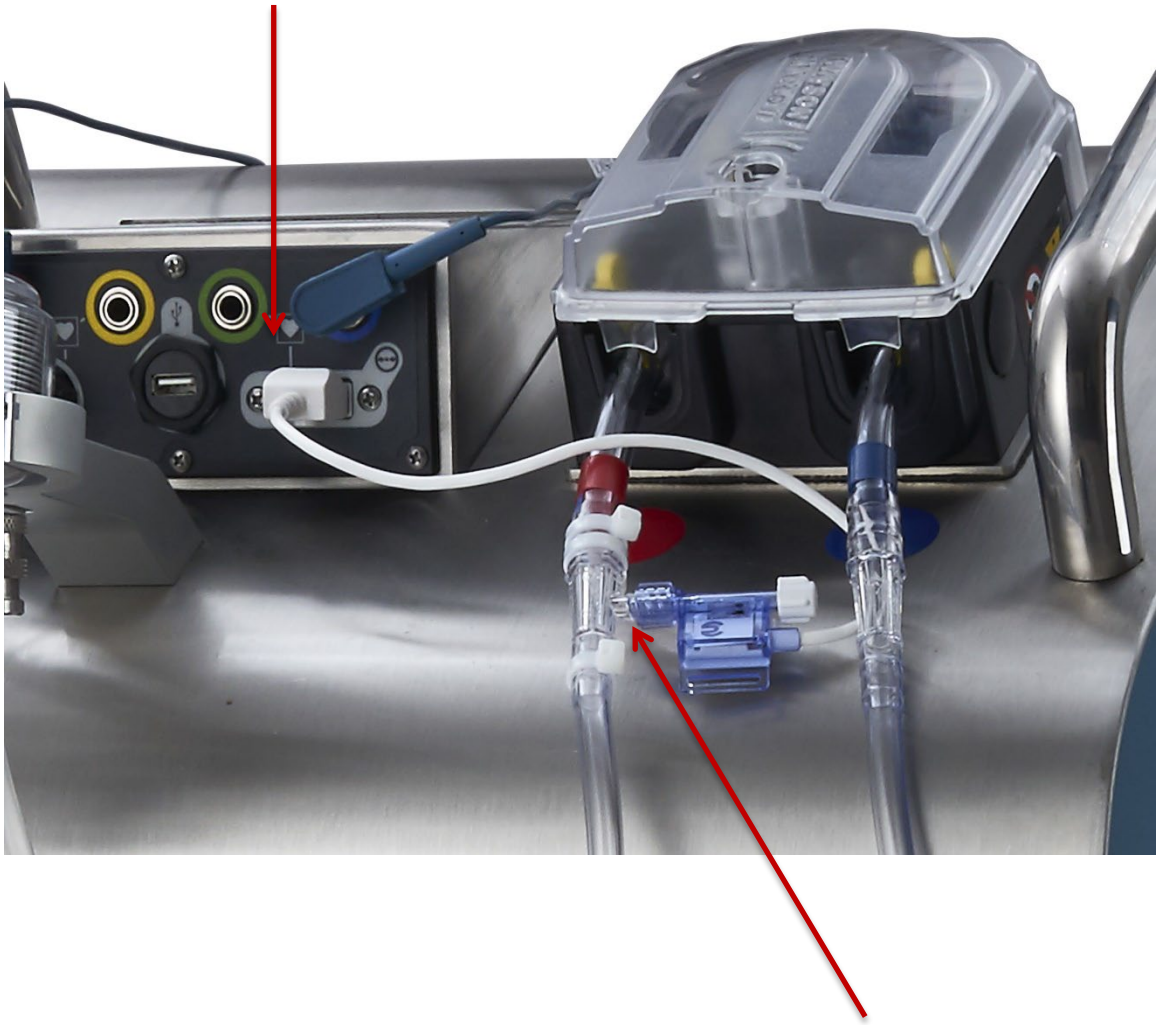

3. Connect the non-disposable/kit heat exchanger water lines (Figure 7).
    a. Pull collar back, push into place connecting small ends of the water lines to the heat exchanger and large ends to the ThermoChem unit.
    b. Ensure water lines are fully seated.

**NOTE:** When attached correctly, the water lines will be parallel to each other. If the water lines cross, the lines are attached incorrectly.

**Figure 7: Water Line Connections**

## Priming the Hyperthermic Perfusion Kit

To prime the perfusion kit tubing:

1. Hang two (2) 1-liter intravenous (IV) bags of Lactated Ringer's Solution, U.S.P., or another physiologically compatible sterile solution from the IV hanger.
2. Spike IV bags with the spikes on the fill tubes of the disposable.
3. Fill the fluid reservoir by opening the clamps from the IV bags.
4. Clamp the fill tubes.

   **NOTE**: Hang additional IV solution bags as needed.
5. Start the ThermoChem unit to begin circulating the fluid. On the touchscreen monitor (Figure 8):
   a. Touch 'START WATER BATH' to start heating and circulating the water bath.
   b. Touch 'START HEAT EXCH' to start the heat exchanger.
   c. Touch 'POWER PUMP' to start the roller pump.
   d. Touch + or-, or the use slider bar to increase roller pump speed.
   e. Check heat exchanger and tubing for leaks. If any are present, replace the perfusion kit and notify ThermaSolutions customer service.

**Figure 8: Touchscreen Monitor**

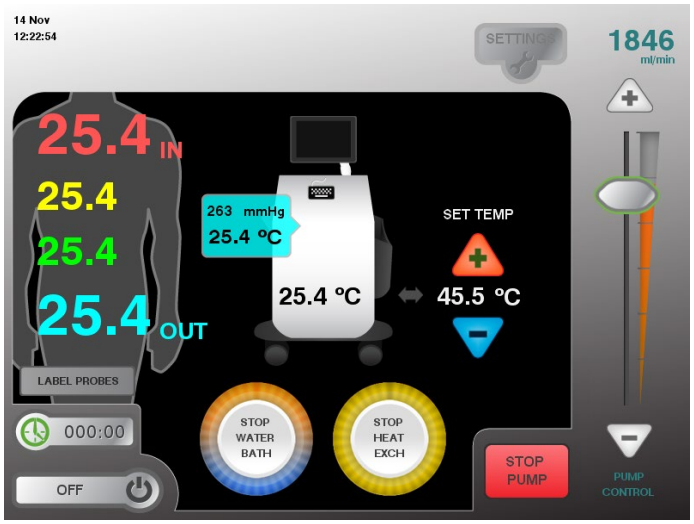


6. Gently hand-tap the heat exchanger to ensure all air has escaped.
7. Set water bath temperature 'Set Temp' to desired temperature by pressing + or –.

   **NOTE:** The water bath should reach the desired temperature within 15 to 20 minutes of starting the heat exchanger.
8. Allow fluid to warm and circulate until the patient is ready for treatment.

**Note:** Water bath circulation may briefly restart then stop automatically if the device senses the water bath heating element is at its upper operational limit. If this situation occurs, one of the alternate water bath buttons will appear. An alternate water bath button may also appear when stopping the water bath. This is a normal condition. (Figure 9)

**Figure 9: Alternate Water Bath Buttons**

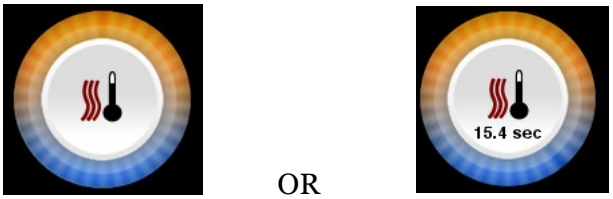


OR

**Note:** When the alternate water bath button (Figure 9) is showing on the main screen, the internal water bath circulation cannot be stopped until the normal water bath button reappears. All other functions of the device will still continue to work normally. This is a normal condition.

## Moving the Prepared ThermoChem Unit

To move the prepared ThermoChem unit into the operating room:

1. Shut down the ThermoChem unit:
    a. Touch 'STOP PUMP'.
    b. Touch 'STOP HEAT EXCH'.
    c. Touch 'STOP WATER BATH'.
    d. Press 'OFF' and confirm software shutdown.
    e. When the unit indicates that it is safe to do so, turn power off using the On/Off switch on the back of the device.
    f. Unplug the power cord from the electrical outlet.
2. Move the ThermoChem unit to the desired location.
3. Restart the ThermoChem unit:
    a. Insert power cord into a standard electrical outlet.
    b. Turn power on using the On/Off switch.
    c. Touch 'START WATER BATH'.
    d. Touch 'START HEAT EXCH'.
    e. Touch 'POWER PUMP'.
    f. Set water bath temperature 'SET TEMP' to desired temperature.

## Patient Preparation and Connection of the Disposable to the Patient

The physician will configure the desired internal patient tubing setup to deliver the warmed solution to the peritoneal cavity and select the desired locations for the disposable patient temperature probes.

**When the physician has placed the temperature probes**:

1. Connect the patient temperature probes to the ThermoChem unit.
    a. Using aseptic technique, the physician will pass the patient temperature probe connections out of the sterile surgical field.
    b. Attach the patient temperature probe connections to the non-disposable temperature probe extension cable.
    c. Connect the non-disposable/kittemperature probe extension cable to the ThermoChem unit connector panel.
2. Label temperature probes on the touchscreen monitor (Figure 9).
    - Red – temperature of fluid flowing into patient (default)
    - Yellow – patient temperature probe (optional)
    - Green – patient temperature probe (optional)
    - Blue – temperature of fluid out from the patient (default)
3. Touch 'SAVE' when temperature probe labels are complete.

**Figure 10: Temperature Probe Labels Screen**

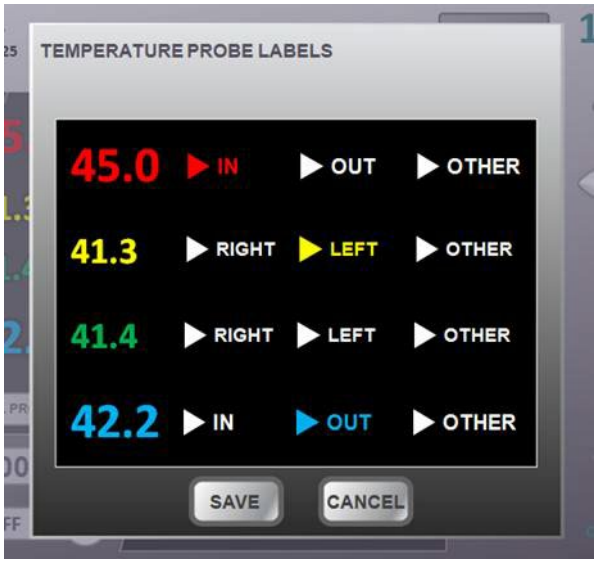

**When the physician is ready for the disposable tubing:**

1. Ensure the inflow catheters, outflow catheters, and temperature probes are correctly placed according to physician preference.
2. Using sterile technique, follow the Instructions for Use in your disposable kit to open patient tubing and pass onto or off of the sterile surgical field.
3. Prior to the physician or operator connecting the disposable tubing to the inflow and outflow catheters, stop the pump by pressing 'STOP PUMP' on the touchscreen monitor.
4. Clamp the patient inflow line to the sterile field and outflow line to the fluid reservoir.
5. Following the Instructions for Use in your Hyperthermic Perfusion kit:
    a. Connect the inflow line from the perfusion kit to inflow tubing at the patient.
    b. Connect the outflow tubing at the patient to the outflow tubing line(s) leading to the fluid reservoir.

## Initiating Patient Treatment

To initiate patient treatment:

1. Unclamp the patient inflow line to the sterile field.

   **NOTE:** Ensure clamp on outflow line to the fluid reservoir remains closed.
2. Touch 'POWER PUMP' to start the roller pump.
3. Touch + or –, or use slider bar, to increase pump speed.
4. Verify fluid is flowing and peritoneal cavity is filling with fluid.
5. Slowly increase roller pump speed until the target flow rate is achieved.
    a. Use slider bar or press + or – on the touchscreen to adjust pump speed.
6. Open the clamp on the patient outflow line to the fluid reservoir. Adjust the clamp on the patient outflow line to achieve the desired fluid volume in the patient's peritoneal cavity. Maintain a reserve amount of fluid in the reservoir.

## Monitor Patient Treatment

1. Maintain a constant level of fluid in the fluid reservoir.
    a. Add additional of Lactated Ringer's Solution, U.S.P., or another physiologically compatible sterile solution as needed.
    b. Evacuate fluid from fluid reservoir as needed.
2. Maintain fluid level in patient's peritoneal cavity as directed by the physician.
    a. Adjust roller pump speed by touching + or –, or use slider bar, on touchscreen monitor.
    b. Adjust the clamp on the patient outflow line on the fluid reservoir.
3. Start the TIMER to measure therapy time. The timer will continue counting until the timer is manually turned off. Turn off the timer by touching the timer symbol on the touchscreen monitor.
   **NOTE:** When the timer is restarted, it will reset to zero.
4. Monitor temperatures.
    a. As directed by the physician, adjust the water bath 'SET TEMP' to achieve desired patient temperature.
5. Monitor the disposable tubing and heat exchanger for leaks, kinks, or other restrictions that could interfere with fluid flow.
6. Respond to any alarms during treatment.
    a. If any tubes are manually clamped, check that they are in the correct position before resuming the treatment.

## Discontinuing Patient Treatment

After treatment is complete:

1. Connect drain tube into waste bag or proper hospital hazardous waste collection container.
2. Stop the roller pump by touching 'STOP PUMP' on the touchscreen monitor.
3. Stop the timer by touching the timer button.
4. Open clamp on drain line. If the drain line is directly before the reservoir, clamp the line to the reservoir. If the drain line is directly after the heat exchanger, clamp the inflow line to the patient.
5. Start the roller pump by touching 'POWER PUMP' on the touchscreen monitor and allow the fluid in the reservoir to slowly drain.
6. IF ADDITIONAL FLUSH OF FLUID IS DESIRED:
    a. When a small amount of fluid remains in the fluid reservoir, stop the roller pump by touching 'STOP PUMP' on the touchscreen monitor.
    b. Hang two (2) additional 1-liter intravenous (IV) bags of Lactated Ringer's Solution, U.S.P., or another physiologically compatible sterile solution from the IV hanger.
    c. With fill tube clamps closed, spike IV bags.
    d. Open clamps on the fill tubes and allow fluid from the IV bags to drain into the reservoir.
    e. At the physician's discretion, start the roller pump and allow fluid to be pumped from the reservoir.
7. When the reservoir and the patient outflow line is empty, stop the roller pump and clamp <u>all</u> lines.
8. Shut down the ThermoChem unit. On the touchscreen monitor:
    a. Touch 'STOP PUMP'.
    b. Touch 'STOP HEAT EXCH'.
    c. Touch 'STOP WATER BATH'.

    **NOTE:** The HT-2000 logs information about the operation of the device. If Operator wants to export this User Log, please follow the directions in Appendix A: Data Input and User Log Export, prior to continuing.

    d. Press 'OFF' and confirm software shutdown.
9. When the unit indicates that it is safe to do so, turn power off using the On/Off switch on the back of the device.

## Perfusion kit Removal

1. Within the sterile surgical field:
    a. Disconnect the patient temperature probes from the non-disposable temperature probe extension cables.
    b. Clamp the perfusion kit inflow and outflow tubes near the patient inflow and return tube assemblies.
    c. If required, disconnect the perfusion kit inflow and outflow tubes from the patient catheters.
    d. Pass the perfusion kit inflow and outflow catheters and lines off the sterile surgical field.
2. From the heat exchanger:
    a. Disconnect the non-disposable/kit heat exchanger temperature probe and place in the side pocket of the ThermoChem unit.
    b. Disconnect the non-disposable/kitwater lines.

    **NOTE:** Ensure a container is available to collect water as it drains from the water lines and heat exchanger.
3. Disconnect the disposable pressure sensor from the HT-2000 Connector Panel.
4. Remove the disposable from the ThermoChem unit:
    a. Remove disposable tubing from roller pump.
    b. Remove the heat exchanger.
    c. Remove fluid reservoir from bracket.
5. Discard all disposable components in accordance with the hospital's disposal policy.
6. Ensure non-disposable components are stowed in the side pocket of the ThermoChem unit including:
    - reservoir bracket
    - IV hanger
    - non-disposable temperature probe extension cables
    - non-disposable heat exchanger temperature probes
    - non-disposable water lines

## Draining the Water Bath

Open the water bath drain to drain the water bath. Drain into a bucket or floor drain. This should be done after every use.

## Exterior Cleanup

Monitor: Only use cleaners that are approved safe for use on touchscreen monitor. Disposable cleaning wipes approved for use on monitors and screens are preferred. Never apply liquid or sprays directly to the screen of the device. Always utilize a clean, abrasion-free cloth when cleaning the monitor screen. Apply liquids or sprays to the cleaning cloth, not directly to the screen. Use the cloth to gently wipe the monitor screen. Any residual cleaner on the screen should be removed with a clean, dry abrasion-free cloth. Isopropyl alcohol wipes (35% to 70%) can be used if other cleaning solutions are not available.

Outer surfaces of the device: Wipe all outer surfaces of the ThermoChem unit using a surface cleaning solution listed as "compatible" for use on stainless steel. Cleaning solutions that are approved for use on blood borne pathogens should be used. Never apply cleaners directly to the device. Apply liquids or sprays to a clean, abrasion-free cloth, and gently wipe the device. Any residual cleaner should be removed with a clean, dry abrasion-free cloth. A solution of 1 part chlorine bleach to 50 parts water can be used if other compatible cleaning solutions are not available.

## Settings

The time, date, and language are set from the 'SETTINGS' screen. Calibration of touch is also available from this screen.

Select 'Settings' on the touchscreen monitor. The 'SETINGS' screen is displayed (Figure 11). Follow the directions below, as appropriate.

**Figure 11: Settings Screen**

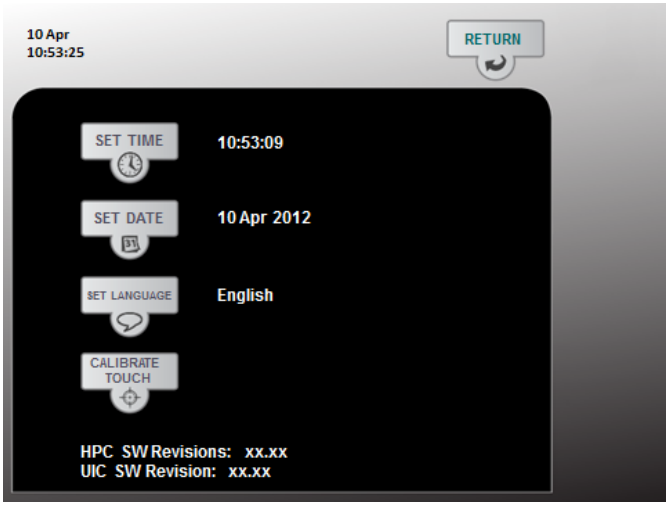


## Set Time

1. Select 'SET TIME'.
2. Touch the appropriate arrows to set the time.
3. Touch 'SAVE' to set the time.

## Set Date

1. Select 'SET DATE'.
2. Touch the appropriate arrows to set the date.
3. Touch 'SAVE' to set the date.

## Set Language (if necessary)

1. Select 'SET LANGUAGE'.
2. Touch the appropriate arrows to set the language.
3. Touch 'SAVE' to set the language.

Touch sensitivity on the touchscreen monitor may be calibrated. Follow the directions below, as appropriate.

## Calibrating Touch

1. Select ‘CALIBRATE TOUCH’.
2. Touch the targets to adjust touch positioning.
3. Touch ‘SAVE’ to set touch calibration.
4. Select ‘SETTINGS’ on the touchscreen monitor

To return to the main screen on the touchscreen monitor, select ‘RETURN’ on the Settings Screen.

## Routine Service, Preventative Maintenance and Repair

## Performed by ThermaSolutions

All service and maintenance other than described above should be performed by an authorized ThermaSolutions Service Representative.

On an annual basis the ThermoChem HT-2000 should receive Preventative Maintenance and certification of operation.

The annual preventative maintenance shall also include disinfecting the water bath system and inspection of labels to ensure they are legible.

## Performed by user

1. Drain water bath after every use.
2. Disinfect water bath system as required by facility policy.
3. Clean exterior after every use.
4. Store reusable accessories in the ThermoChem side pocket.

No other maintenance or service should be performed by the user.

## Cleaning and Disinfection

Please see ThermoChem Cleaning and Disinfection Manual, for all updated procedures for cleaning of the device, water bath reservoir and components. (Document # MNL-2020)

## Preparation for Shipping

If the device is to be shipped complete these steps:

1. Drain the unit into container capable of holding at least three liters (3L) of fluid. Discard the water in accordance with facility policy.
2. Document the maintenance work on the unit.

## Troubleshooting

| Issue | Solution/Response |
|---|---|
| An 'Error Alert' is displayed/ Alarm is displayed on touchscreen monitor | Follow instructions listed below the alarm.<br>Touch the 'Clear' icon to clear the alarm. |
| 'Error Alert' message cannot be cleared. | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Touchscreen monitor is blank. | Ensure touchscreen monitor is turned on and all cords are connected. Power button for monitor is on the lower right side of monitor. |

## Technical Alarms

| High Priority Technical Alarm Message | Solution/Response |
|---|---|
| System communications Failure | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists.<br>The alarm notification will occur about 30 seconds after event has occurred. |
| Heat exchange 1 hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Heat exchange 2 hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Water bath 1 hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Water bath 2 hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Pressure hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Internal heater hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Safety signal hardware fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Heat exchanger is too hot | Replace heat exchanger temperature probe.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| No water bath temperature | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |

| High Priority Technical Alarm Message Cont'd | Solution/Response |
|---|---|
| Water bath is too hot | Make sure heat exchanger and water bath are off and the temperature is set to 37C.<br>Touch Clear icon and you can continue use of the patient pump.<br>Power Cycle Device to try getting back to full use.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Heat exchange measure fault | Replace heat exchanger temperature probe. |
| Water bath measure fault | Touch Clear icon.<br>Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Water bath heater fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Water bath low | Ensure that water bath has at least 2 L of water and touch clear icon. |
| Pump control error | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists.<br>The alarm notification will occur about 7 seconds after event has occurred. |
| Unspecified internal fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Watchdog fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| Pump door open | Close Patient Pump door and touch clear. |
| No heat exchanger temperature | Reattach or replace heat exchanger temperature probe. |
| Pressure is too high | Check lines before continuing.<br>Touch clear icon. |

| Medium Priority Technical Alarm Message | Solution/Response |
|---|---|
| Internal board temp is too hot | Touch clear icon.<br>Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |
| High pump speed | Touch clear icon.<br>Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists.<br>The alarm notification will occur about 9 seconds after event has occurred. |
| Low pump speed | Touch clear icon.<br>Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists.<br>The alarm notification will occur about 9 seconds after event has occurred. |
| Pressure is elevated | Check lines for occlusion before continuing.<br>Touch clear icon. |
| Audio failure | Touch clear icon. Audio alarm may no longer be available until device is powered cycled. |
| Electronics enclosure fan fault | Touch clear icon.<br>Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists |
| Water bath fan fault | Power Cycle Device.<br>Notify Customer Service at the number listed on the back of this manual if problem persists. |

## Electromagnetic Environment Guidance

| **Electromagnetic Environment Guidance** | |
|---|---|
| **Electromagnetic Emissions** | **Compliance** |
| RF Emissions EN 60601-1-2:2015<br>(CISPR 11:2015 +A1:2016)<br>IEC 60601-1-2:2014/ ICES-003, Issue 5:2012 | Group 1<br>Class A<br><br><br>Class A<br>Class A |
| Harmonic emissions IEC 61000-3-2:2014 | Class A |
| Voltage fluctuations/flicker emissions IEC 61000-3-3:2013 | AC Input |
| **Electromagnetic Immunity** | **Compliance** |
| Electrostatic Discharge (ESD)<br>IEC61000-4-2:2008 | Contact<br>±8kV<br>Air<br>±2kV, ±4kV, ±8kV, ±15kV |
| Radiated RF Electromagnetic Fields IEC 61000-4-3:2010 | 80 to 2700 Mhz 3 V/M AM 80% 1khz ,3 sec dwell |
| Electrical fast transients/burst IEC 61000-4-4:2012 | Test at AC Portat ±2kV and Patient Temperature Sensor at ±1kV |
| Surge IEC 61000-4-5:2014 | Test at AC Port for open circuits and short circuits at ±0.5kV, ±1kV, ±2kV |
| Conducted disturbances, induced by RF fields IEC 61000-4-6:2013 | 0.15 Mhz to 80 Mhz 3 VRMS AM 80% 1 khz 3 sec dwell |
| Power frequency (50 hz) magnetic field IEC61000-4-8:2009 | Test at AC Port with 30A/m at 60Hz |
| Voltage dips, short interruptions, and voltage variations on power supply input lines, IEC61000-4-11:2004 | Test at AC Port for 220 Vac/60hz, 100 Vac/60Hz |

# Unit Specifications

### Weight and Dimension

Depth: 43.2 cm (17 in)
Width: 44.5 cm (17.5 in)
Depth at base casters: 58.4 cm (23 in)
Width at base casters: 61.0 cm (24 in)
Height:
With monitor: 131 cm (51.5 in)
Without monitor: 100 cm (39.5 in)
Weight: 106 kg (235 lbs.)
Shipping weight: 201 kg (444 lbs.)

### Electrical Supply

Class I
Type B Patient Protection
Type CF Patient Protection, See Label
US: 120V ± 10%/60 Hz, 12A
EU: 240V ± 10%/50Hz, 6A

### Operation Temperature Range

Water bath: 36°C to 47°C
Default temperature primary fluid:
Water bath: 42°C
Default temperature primary fluid (for alarm defaults):
Water bath: 37°C

### Water Bath Temperature Safety Limits

Software: 53°C ± 1°C
(Roller pump shuts off)
Hardware: 55°C + 3°C, - 1.7°C
(Heater shuts off)

### Heat Exchanger Temperature Safety Limits

Software: 47°C ± 1°C
Hardware: 48°C ± 1°C

### Operating Conditions

Ambient temperature range: 10°C to 40°C
Relative humidity range: 30% to 75%, Non-condensing
Pressure range: 525 mmHg to 795 mmHg
Mode of operation: Continuous

IEC60529 IPX0

### Shipping and Storage

Storage Temperature: -40°C to 70°C
Storage relative humidity: 15% to 95%, non-condensing
Storage pressure: 510 mmHg to 795 mmHg

### Fluid Flow Rate

User adjustable to 0 to 2400 ml/min

### EMC Compliance

IEC 60601-1-2, 4$^{th}$ edition, 2014
CISPR 11, group 1, Class A

### Alarm Signal Sound Pressure Range

50 – 70db

# Appendix A

## Data Input and Patient Log Export

The HT-2000 logs information about the operation of the device during the preparation and treatment phases. The patient log contains the device data displayed on the main screen. The patient log also contains the patient information and treatment events that have been entered by the user. The patient log can be retrieved using a USB drive following the instructions below.

1. When treatment is finished, plug a USB drive into the USB port on the device. **Note:** (Do not do this during a treatment procedure)
2. Wait a few seconds for the USB drive to be recognized and then press the 'OFF' button on the touchscreen.
3. The USB Shutdown Screen (Figure 12) should show on the monitor.
4. Touch the 'Export Patient Log' button. This button will display green if there is user data that can be exported.
5. All patient logs will be downloaded off the device and onto the USB drive. (Figure 13)
6. Touch the 'Shutdown' button to turn off the device (and follow the directions on the screen to power down); or touch the 'RETURN' button to go back to the main treatment screen.
7. Remove the USB drive when the device is powered off.

**Note:** When returning to the main screen after a user log export, the device will start a new log file. New log files are also created after a power cycle of the device (device being turned off then on again or an unexpected disruption of power to the device). All log files are in comma separated values format and can be opened in a compatible spreadsheet program.

**Figure 12: USB Shutdown Screen**

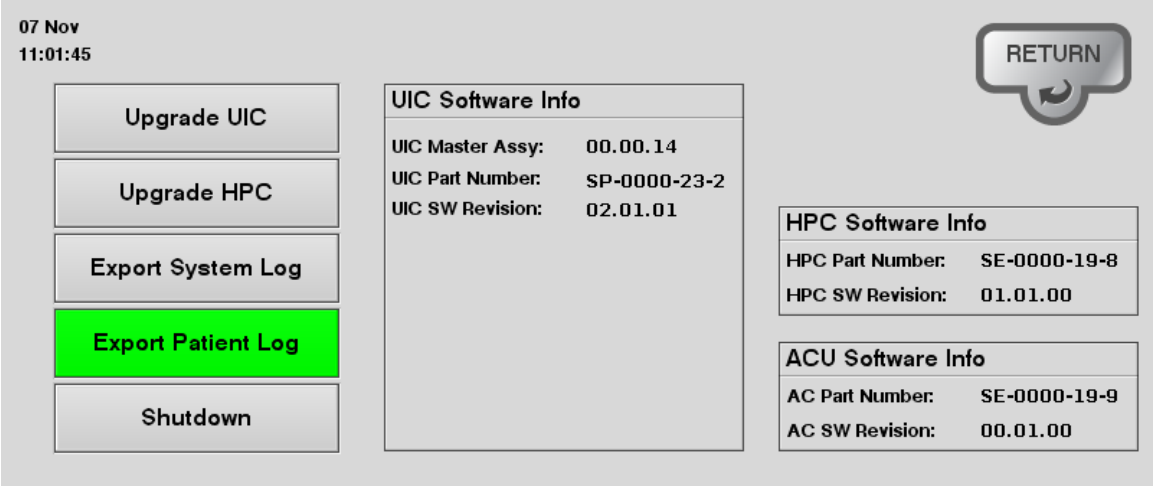


**Figure 13: Patient Log Download**

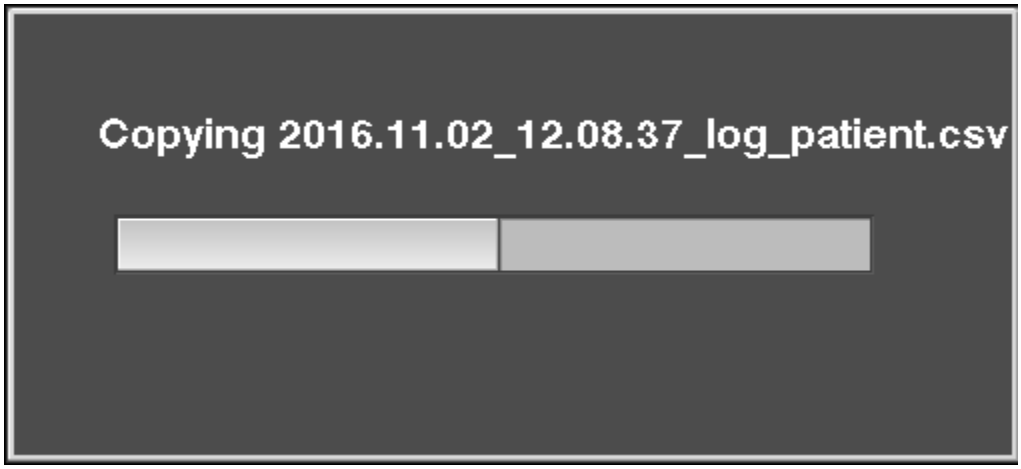

## Patient Information and Treatment Event Data

Patient information and treatment events can be entered by the User Interface Icon on the device. The User Interface Icon appears as a keyboard on the main treatment screen of the device. When the icon is pressed, the User Interface and keyboard appears. The User Interface has two (2) screens: the Patient Information screen and the Treatment Event screen. Information entered and saved in either of these screens becomes part of the patient log and can be downloaded from the device. The following instructions explain how to enter Patient and Treatment data.

### Enter Patient ID

1. Select the white box to the right of 'Patient ID'. (Figure 14)
2. Using the keyboard, type in the patient id information.
   **Note:** Protect private and confidential patient information according to hospital policy.
3. Save the Patient ID by selecting the save record button, labeled 'Save rec.'

### Retrieve a previous Patient ID

If you are continuing treatment on a previous patient or want to utilize previous Patient Information or Treatment Events:

1. Select the white box to the right of 'Patient ID'.
2. Using the keyboard, type in the patient id information.
3. Retrieve the previous Patient and Treatment information by selecting the load record button, labeled 'Load rec.'

### Enter Information Record

The Information Record allows for free entry of treatment specific information using the keyboard.

1. Select the white box to the beneath of 'Information Record'.
2. Using the keyboard, type in the information.
3. Save the Information Record by selecting the save record button, labeled 'Save rec.'

**Figure 14: Patient Information Screen**

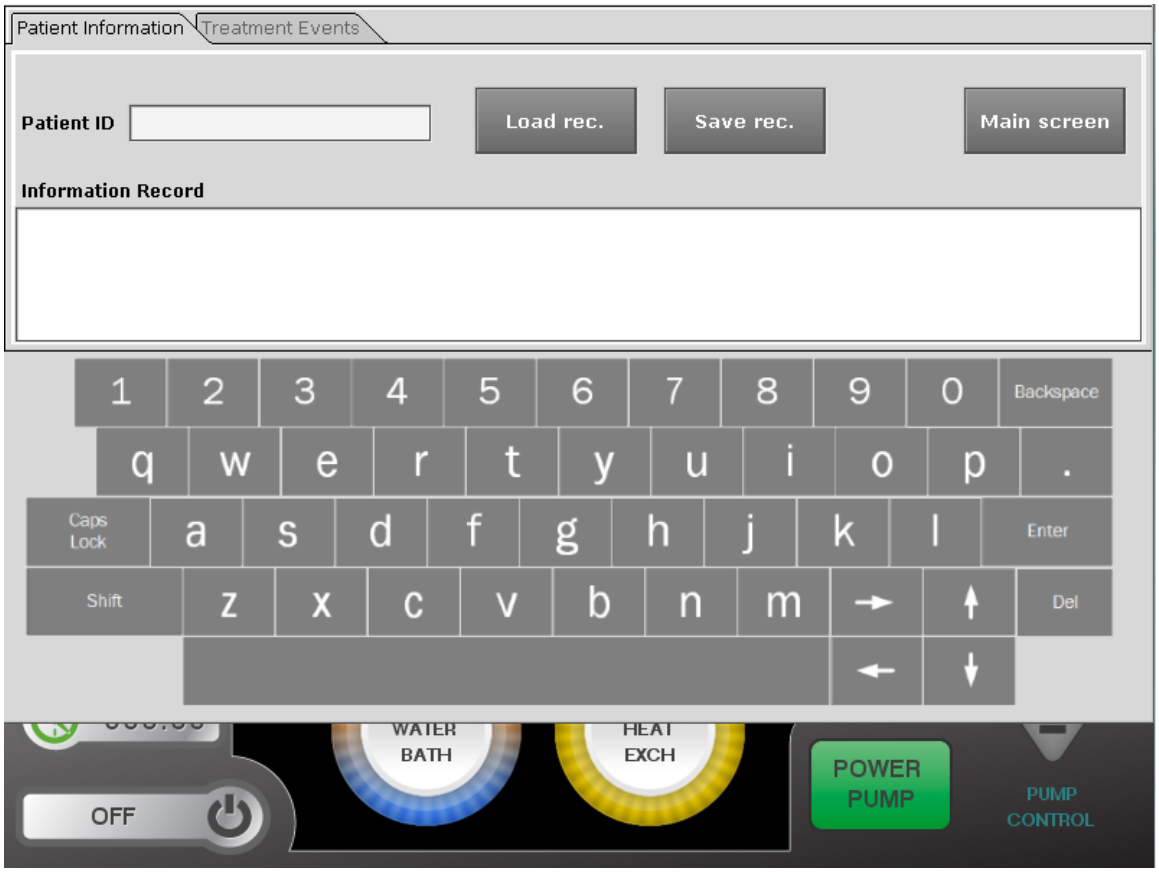

### Enter Treatment Events

This page allows the input of specific data and records that data along with the time of entry. This feature is useful for recalling time specific events and data.

1. Select the tab labeled 'Treatment Events' to access the treatment events page.
2. Select the white box below 'Event Record'.
3. Using the keyboard, type in the event information.
4. Save the treatment event by selecting the save event button, labeled 'Save event'.

**Note**: After the event has been saved, the event will appear below the input box, along with a time stamp for the event. The events can be reviewed using the navigation keys on the keyboard.

### Return to Main Screen

After 20 seconds of inactivity, the Patient Information and Treatment Events screen will close. However, to return to the main screen at any time, select the main screen button, labeled 'Main screen'.

**Figure 15: Treatment Information Screen**

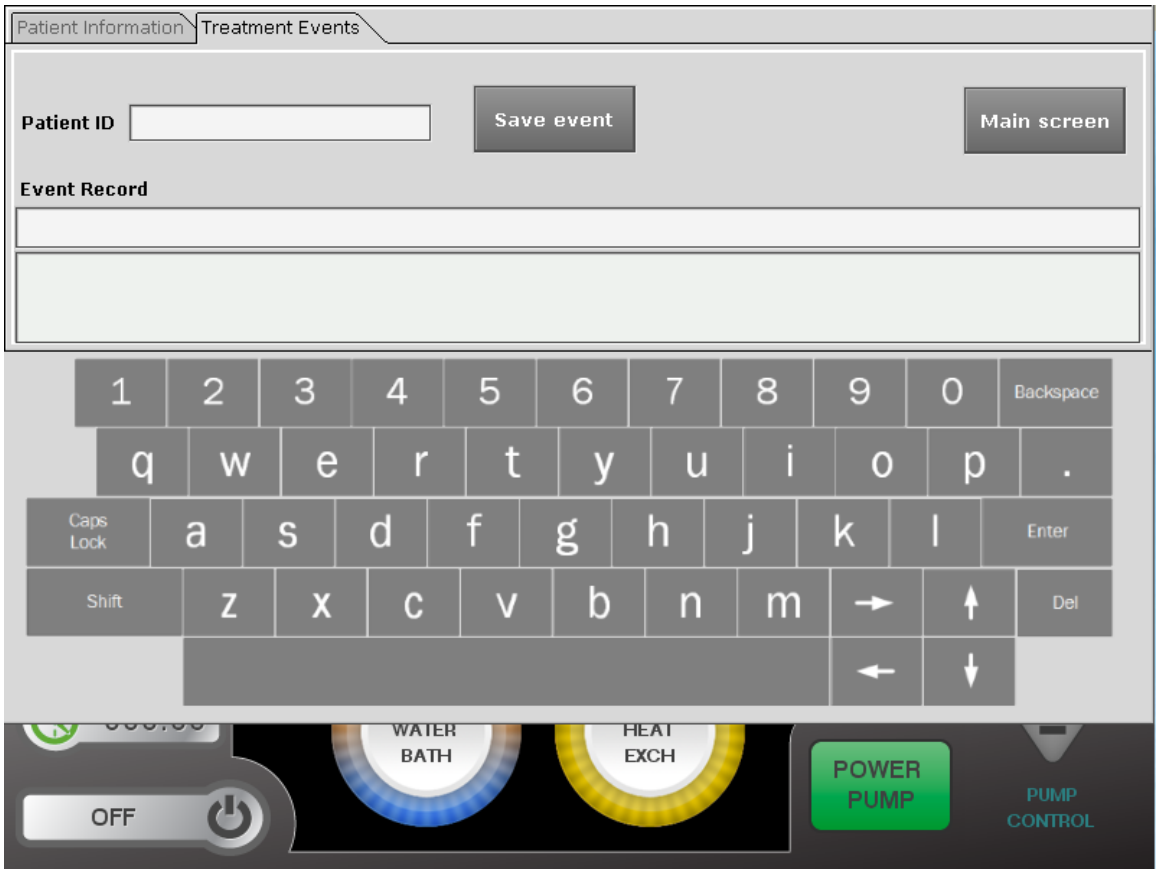

Document No. MNL-2001. Ver.2 2022/07

CE
1639

EC REP

Manufactured for:
ThermaSolutions
1889 Buerkle Road
White Bear Lake, MN 55110 USA
Phone: 651-209-3900
Customer Service: 877-952-6100

EU Authorized Representative
ThermaSolutions Europe B.V
Takkebijsters 41
NL-4817 BL Breda
Phone: +31 76 579 1144